

KRAUS Vibratory Bin Discharger



Gyratory motion for more effective discharging of stored material

The Kraus Vibratory Bin Discharger is designed to greatly improve the gravity discharging process of difficult-to-handle dry bulk solids which tend to bridge or rat hole in storage silos, bins and/or hoppers.

The primary feature of the Kraus Vibratory Bin Discharger is that it imparts a gyratory motion for a better activation of the stored material. In addition, the suspension mountings are designed to allow optimum gyratory motion without restriction in any axis, creating a better and more efficient transfer of energy from the activation dome to the stored materials. As an added benefit, when the gyratory motion is combined with the unique trough design, a larger material volume is activated and the result is more effective discharging without locking up.

The Kraus Vibratory Bin Discharger is ideal for almost any stored dry bulk granular material, from very fine to very coarse. Ask for a test to determine just how effective the Kraus Vibratory Bin Discharger can be on your difficult material.

Engineering Specifications

Motors

Standard: 230/460 volt totally enclosed non-ventilated

Optional: Explosion proof class 1 group D
Class 2 group F & G
Special voltages

Outlet sizes

Based upon flow rate or custom requirements

Finishes

Standard: Gray enamel (external & internal)

Custom: Available upon request

Material of Construction

Standard: Mild steel

Custom: 304 or 316 Stainless steel


Flexible Sleeves

Black or white reinforced EPDM

Reinforced white silicone

Reinforced nylon

Kraus Vibratory Bin Discharger Dimensions

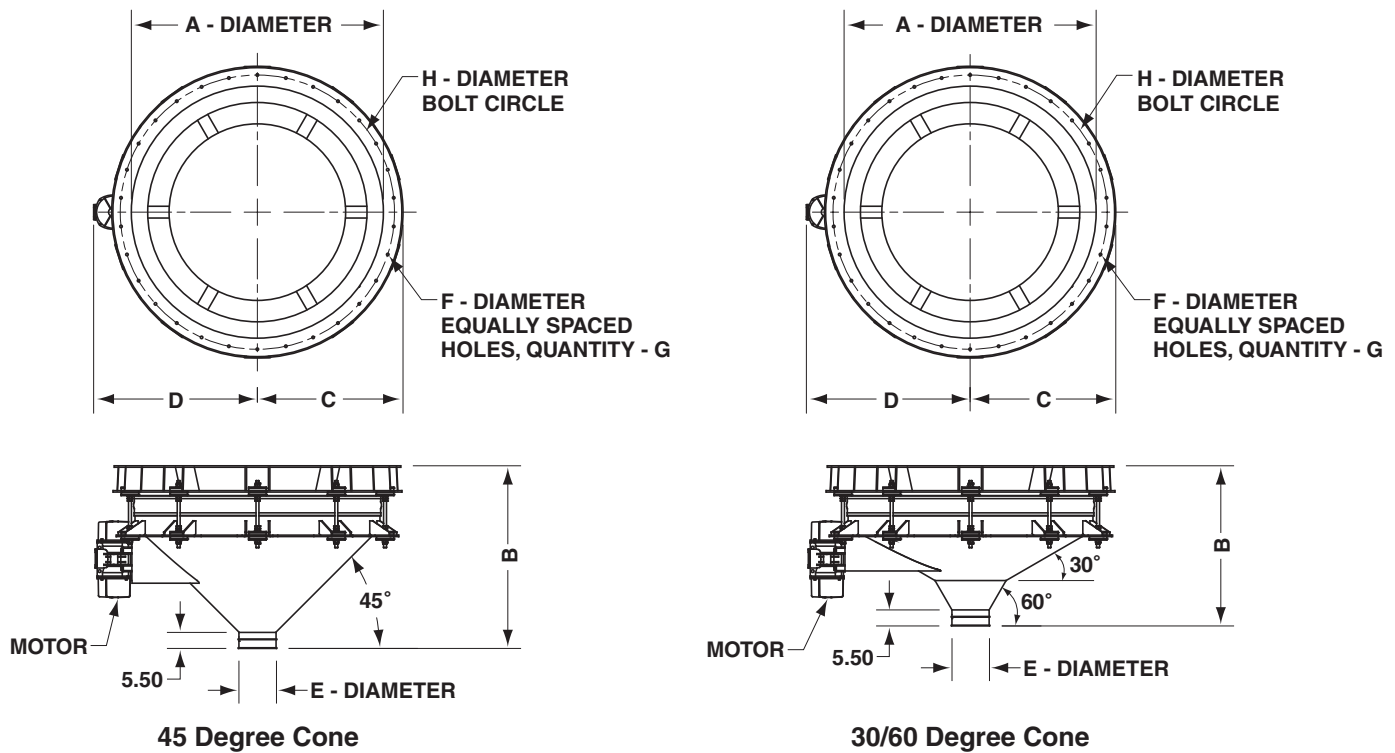

Model	45 Degree Cone Dimensions in inches (mm)								Approx. Ship Weight in lbs (kg)
	A	B	C	D	E	F	G	H	
902-30	30 (762)	38.5 (978)	18 (457)	23.0(584)	8 (203)	0.63 (16)	11	33 (838)	480 (218)
902-36	36 (914)	41.5 (1054)	21 (533)	26.0 (660)	8 (203)	0.63 (16)	15	39 (991)	575 (261)
902-48	48 (1219)	46.5 (1181)	28 (711)	33.0 (838)	10 (254)	0.63 (16)	19	52 (1321)	750 (340)
902-60	60 (1524)	52.5 (1334)	34 (864)	40.5 (1029)	10 (254)	0.75 (19)	22	64 (1626)	1025 (465)
902-72	72 (1829)	57.5 (1461)	42 (1067)	48.5 (1232)	12 (305)	0.75 (19)	30	78 (1981)	1550 (703)
902-84	84 (2134)	63.5 (1613)	48 (1219)	54.5 (1384)	12 (305)	0.75 (19)	37	90 (2286)	2000 (907)
902-96	96 (2438)	68.5 (1740)	54 (1372)	60.5 (1537)	14 (356)	0.75 (19)	45	102 (2591)	2675 (1213)
902-108	108 (2743)	74.5 (1892)	60 (1524)	66.5 (1689)	14 (356)	0.75 (19)	51	114 (2896)	3350 (1520)
902-120	120 (3048)	80.5 (2045)	66 (1676)	72.5 (1842)	14 (356)	0.88 (22)	58	126 (3200)	4200 (1905)
902-132	132 (3353)	86.5 (2197)	72 (1829)	80.5 (2045)	14 (356)	0.88 (22)	65	138 (3505)	5200 (2359)
902-144	144 (3658)	92.5 (2350)	78 (1981)	86.5 (2197)	14 (356)	0.88 (22)	72	150 (3810)	6000 (2722)
Model	30/60 Degree Cone Dimensions in inches (mm)								Approx. Ship Weight in lbs (kg)
	A	B	C	D	E	F	G	H	
932-30	30 (762)	32.5 (826)	18 (457)	23.0 (584)	8 (203)	0.63 (16)	11	33 (838)	480 (218)
932-36	36 (914)	36.5 (927)	21 (533)	26.0 (660)	8 (203)	0.63 (16)	15	39 (991)	575 (261)
932-48	48 (1219)	40.5 (1029)	28 (711)	33.0 (838)	10 (254)	0.63 (16)	19	52 (1321)	750 (340)
932-60	60 (1524)	45.0 (1143)	34 (864)	40.5 (1029)	10 (254)	0.75 (19)	22	64 (1626)	1025 (465)
932-72	72 (1829)	53.0 (1346)	42 (1067)	48.5 (1232)	12 (305)	0.75 (19)	30	78 (1981)	1500 (680)
932-84	84 (2134)	56.5 (1435)	48 (1219)	54.5 (1384)	12 (305)	0.75 (19)	37	90 (2286)	1950 (885)
932-96	96 (2438)	65.0 (1651)	54 (1372)	60.5 (1537)	14 (356)	0.75 (19)	45	102 (2591)	2600 (1179)
932-108	108 (2743)	73.0 (1854)	60 (1524)	66.5 (1689)	14 (356)	0.75 (19)	51	114 (2896)	3200 (1451)
932-120	120 (3048)	80.5 (2045)	66 (1676)	72.5 (1842)	14 (356)	0.88 (22)	58	126 (3200)	4025 (1826)
932-132	132 (3353)	88.5 (2248)	72 (1829)	80.5 (2045)	14 (356)	0.88 (22)	65	138 (3505)	4925 (2234)
932-144	144 (3658)	96.5 (2451)	78 (1981)	86.5 (2197)	14 (356)	0.88 (22)	72	150 (3810)	5725 (2597)

Dimensions and specifications subject to change without notice.

Kraus Vibratory Equipment® is a registered trademark of Dynamic Air Inc., St. Paul, Minnesota.

U.S. and Foreign Patents Pending.

© 2010, Kraus Vibratory Equipment

Bulletin K101106-4 (dm2) • Printed in the USA

KRAUS®
VIBRATORY EQUIPMENT

A division of Dynamic Air Inc.

Corporate Headquarters

Dynamic Air Inc. • St. Paul, MN USA • +1 651 484-2900

Worldwide Offices

Australia • Brazil • China • United Kingdom

www.dynamicair.com • www.krausvibratory.com